

TAELCO

*Sensors for Aerospace
Applications...*



Builds the future!

PTSC Series Combined Pressure and Temperature Sensors

PTSW Series Combined Pressure and Temperature Sensors

PSC Series Pressure Sensors



TSC Series Temperature Sensors

TSCL Series Temperature Sensors

T A E L C O

www.taelco.com

PTSC-EP Series

Enhanced Combined Pressure Temperature Transducers



Description

The PTSC-EP series is an enhanced version of the standard PTSC-EP series combined pressure temperature sensor. Designed to withstand harsh environments and meet the demanding requirements of the aerospace and naval industries, its significantly reduced weight and small design makes it ideal for applications where space and weight are critical.

The PTSC-EP grade includes EMI/RFI protection and is operational under extreme vibration and mechanical shock, in environments contaminated with fuels, oils and solvents and has an extended temperature range of -55°C to +125°C.



PTSC-EP Series Specifications

Performance

Pressure	
Accuracy	≤ ±0.5% at RT
Non linearity	≤ 0.15% FS
Lifetime Drift (1000h, +125 °C)	≤ 0.5% FS
TEB (-55 °C to +125 °C)	≤ 2.5% FS
TEB (0 °C to +85 °C)	≤ 1.0% FS
Proof pressure	2 x FS pressure
Burst pressure	3 x FS pressure
Pressure response	< 1ms

Temperature	
RTD operating range	-200 +600 °C
RTD compensated range	-50 +600 °C
Accuracy	PT100 / PT1000 Class B
Temp response time ¹⁾	< 2s

Environmental Specifications

Low Temp (Storage)	-55 °C DO-160G Section 4.5.1
Low Temp (Operating)	-55 °C DO-160G Section 4.5.2
High Temp (Storage)	+125 °C IEC 60068-2-2
High Temp (Operating)	+125 °C IEC 60068-2-2
Shock	40G 11ms Half Sine 3-axis MIL-STD-810G, Method 516.6
Vibration	Random: 15 to 2000 Hz @ approx. 50G (peak) MIL-STD-810G, Method 514.6

Altitude (Storage)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.I
Altitude (Operating)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.II
Salt Fog	MIL-STD-810G CHG-1, Method 509.6
Sealing	IP67, IEC-60529

Electrical Specifications

Supply voltage ²⁾	0.5-4.5V Output, 9-32VDC 2-10V Output, 12-32VDC
Output temperature ²⁾	PT100 / PT1000
Current consumption	< 10mA
Reverse voltage protection	Yes
Electrical interface ³⁾	D38999/20WB98PN
Bonding	see details ⁴⁾
RTD max current	PT100 : 1.4mA
	PT1000 : 0.4mA

Mechanical Specifications

Material ⁵⁾	Al7075T7651
Finish ⁶⁾	Anodizing per MIL-A-8625 Type 3 Class 2
Sealing	PTFE
Pressure port	See ordering information
Weight	35g (Aluminum body)
Lock/Safety Wire	Applicable
Mounting Torque	Aluminum : 2.5Nm
	Stainless Steel : 5Nm


1) For aluminum material. Dependent on material.
2) Please contact us for custom solutions.
3) For details see electrical interface section on page 3. For different connector materials contact us.
4) Enclosure and connector offers full and continuous protection from EMI/RFI effects.
5) For production in different materials please contact us.
6) Anodizing only for Al7075T7651 material.

PTSC-EP Series

Enhanced Combined Pressure Temperature Transducers



Ordering Information

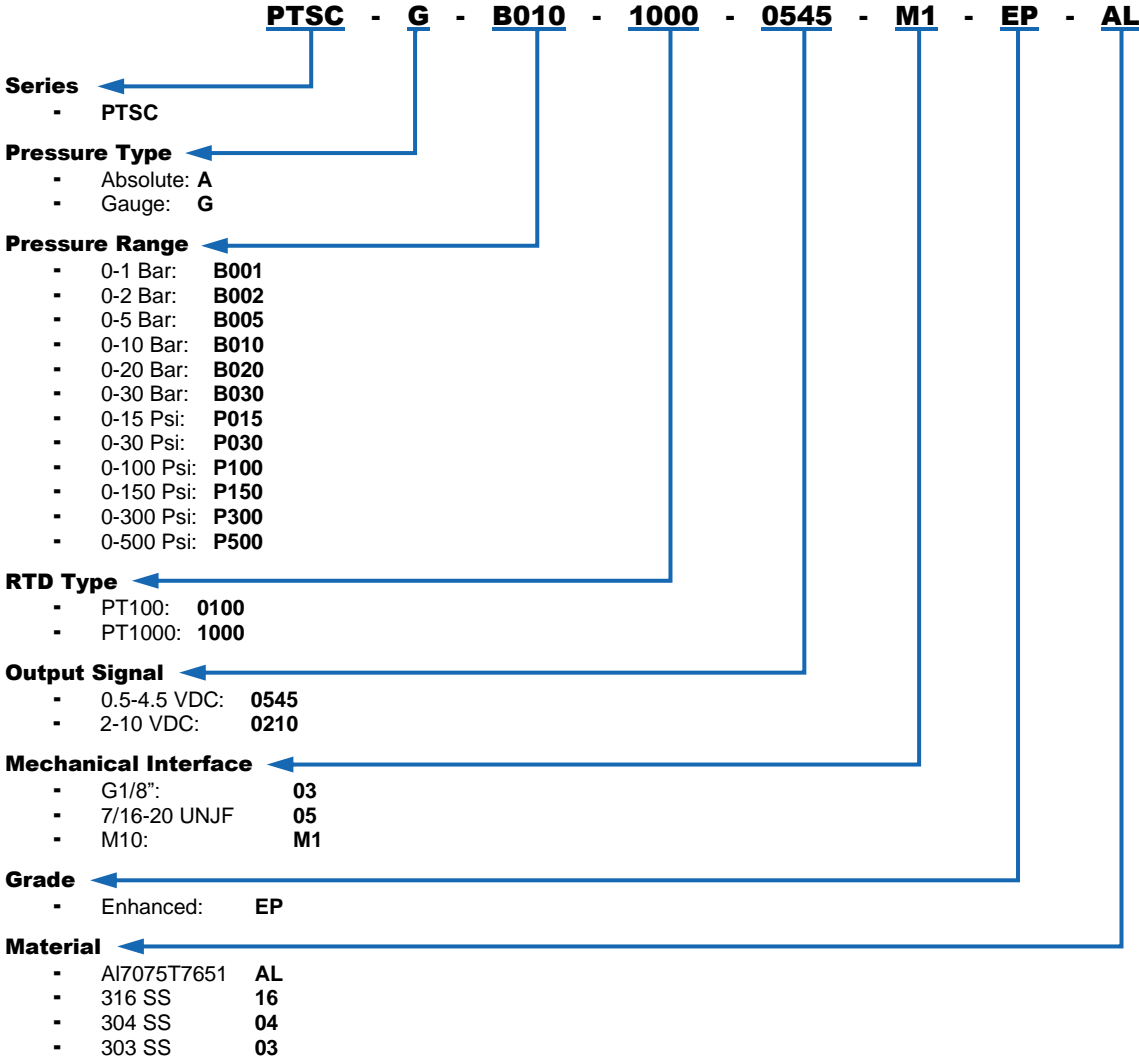

Typical ordering example: Gauge, 10 bar pressure, PT1000 RTD, 0.5-4.5 output signal, M10 mechanical interface, Enhanced grade, A17075T7651 material: **PTSC-G-B010-1000-0545-M1-EP-AL**

For stock and price inquiry please contact us at: sales@taelco.com or www.taelco.com/en/contact-us/
Shipping, customs fees etc. are not included in the price quotation. TAE LCO is not responsible for customs clearance.


PTSC-EP Series

Enhanced Combined Pressure Temperature Transducers



Dimensions and Interfaces


Housing & Pressure Interface

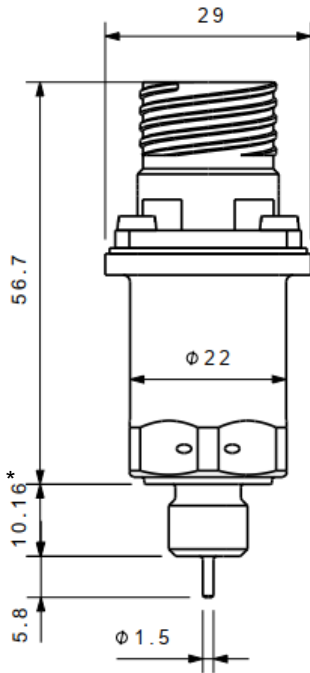

Electrical Interface (I/F)

The electrical I/F is a D38999/20WB98PN compatible circular connector.

Connector Pin Out	
Supply +	A
Pressure Signal	B
GND	C
Temp Signal	D
Temp Signal	E
No Connect (NC)	F



*) For 7/16-20 UNJF thread interface. Please contact us about details for different thread interfaces.

Revision History

Revision	Reasons for Revision	Issue Date
REV B	<ul style="list-style-type: none">Added mounting torque information to Mechanical Specifications table.Added footnote about thread interface to Housing & Mechanical Interface section.Removed G1/4", R1/4", R1/8" mechanical interfaces from Ordering information section.	08.10.2024
REV A	<ul style="list-style-type: none">First revision.	12.09.2024

Notice and Disclaimer

The information presented here is believed to be correct. TAE LCO assumes no responsibility for the use of its products, nor for the use of any information that has been provided. The user is responsible for determining the suitability of the product for the user's application or use. Specifications subject to change without notice. Trademarks are the property of their respective owners.

PTSW-EP Series

Enhanced Combined Pressure Temperature Transducers



Description

The PTSW-EP series is an enhanced version of the standard PTSW-I series combined pressure temperature sensor. Designed to withstand harsh environments and meet the demanding requirements of the aerospace and naval industries, its significantly reduced weight and small design makes it ideal for applications where space and weight are critical.

The PTSW EP grade includes EMI/RFI protection and is operational under extreme vibration and mechanical shock, in environments contaminated with fuels, oils and solvents and has an extended temperature range of -55 °C to +125 °C.



PTSW-EP Series Specifications

Performance

Pressure	
Accuracy	≤ ±0.5% at RT
Non linearity	≤ 0.15% FS
Lifetime Drift (1000h, +125 °C)	≤ 0.5% FS
TEB (-55 °C to +125 °C)	≤ 2.5% FS
TEB (0 °C to +85 °C)	≤ 1.0% FS
Proof pressure	2 x FS pressure
Burst pressure	3 x FS pressure
Pressure response	< 1 ms

Temperature	
RTD operating temp. range	-200 +600 °C
RTD compensated temp. range	-50 +600 °C
Accuracy	PT100 / PT1000 Class B
Temp response time ¹⁾	< 2s
RTD max current	PT100 : 1.4mA
	PT1000 : 0.4mA

Environmental Specifications

Low Temp (Storage)	-55 °C DO-160G Section 4.5.1
Low Temp (Operating)	-55 °C DO-160G Section 4.5.2
High Temp (Storage)	+125 °C IEC 60068-2-2
High Temp (Operating)	+125 °C IEC 60068-2-2
Shock	40G 11ms Half Sine 3-axis MIL-STD-810G, Method 516.6
Vibration	Random Vib.:15 to 2000 Hz @ approx. 50G (peak) MIL-STD-810G, Method 514.6

Altitude (Storage)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.I
Altitude (Operating)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.II
Salt Fog	MIL-STD-810G CHG-1, Method 509.6
Sealing	IP67, IEC-60529

Electrical Specifications

Supply voltage ²⁾	0.5-4.5V Output, 9-32VDC 2-10V Output, 12-32VDC
Output temperature ²⁾	PT100 / PT1000
Current consumption	< 10mA
Reverse voltage protection	Yes
Electrical interface ³⁾	M27500G26ML5 spec. cable 5 x 26 AWG tinned copper, round braid shield, PVDF jacket
Bonding	see details ⁴⁾

Mechanical Specifications

Material ⁵⁾	Al7075T7651
Finish ⁶⁾	Anodizing per MIL-A-8625 Type 3 Class 2
Sealing	PTFE
Pressure port	See ordering information
Weight	30g (Dependent on configuration)
Cable Termination	Fluid resistant elastomer
Lock/Safety Wire	Applicable
Mounting Torque	Aluminum : 2.5Nm
	Stainless Steel : 5Nm


1) For aluminum material. Dependent on material.
 2) Please contact us for custom solutions.
 3) Cable termination with D38999/26WA35PN circular connector is available.
 4) Enclosure and cable offers full and continuous protection EMI/RFI effects.
 5) For production in different materials please contact us.
 6) Anodizing only for Al7075T7651 material.

PTSW-EP Series

Enhanced Combined Pressure Temperature Transducers

T A E L C O

Ordering Information

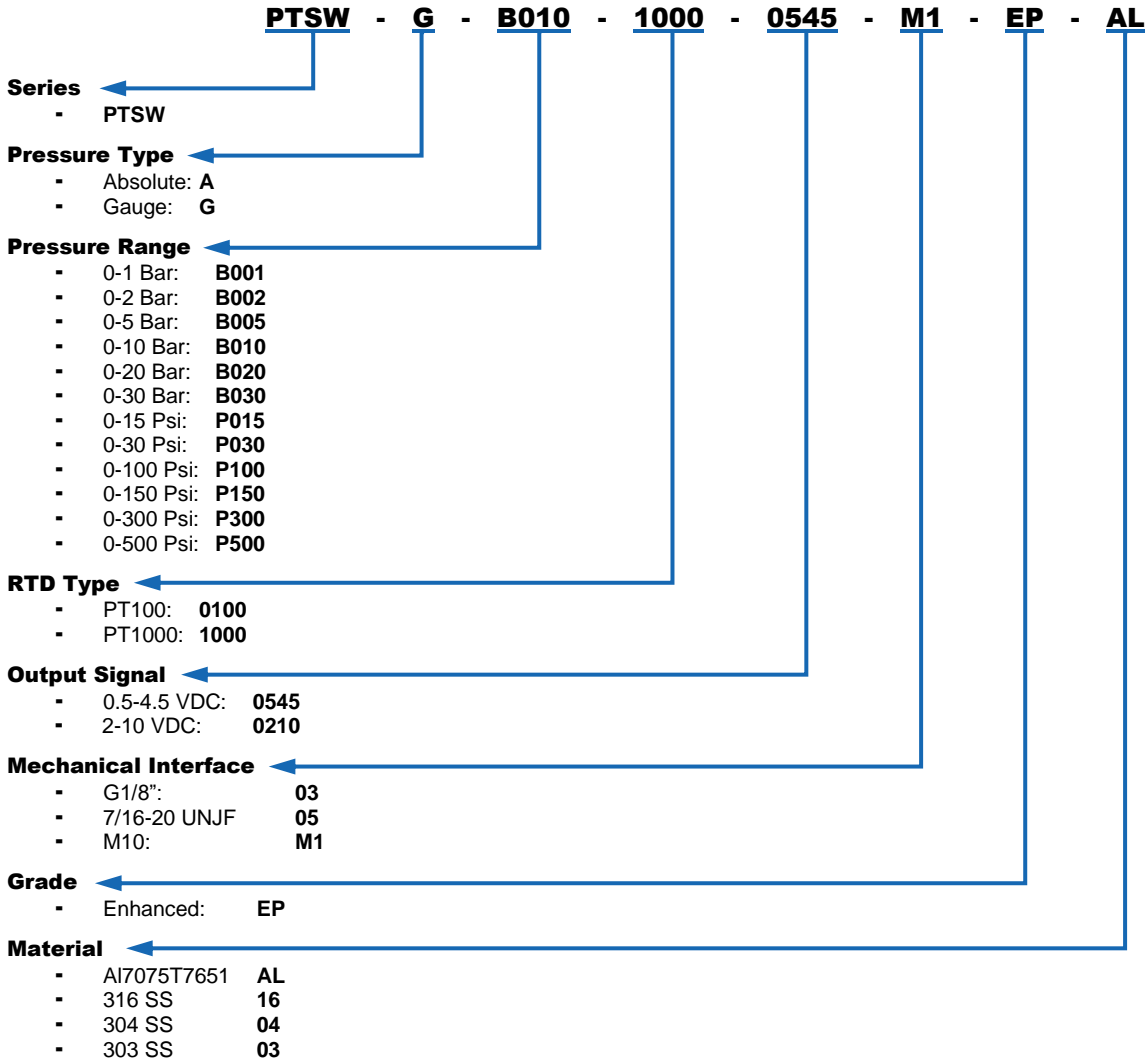


Typical ordering example: Gauge, 10 bar pressure, PT1000 RTD, 0.5-4.5 output signal, M10 mechanical interface, Enhanced grade, Al7075T7651 material: **PTSW-G-B010-1000-0545-M1-EP-AL**

For stock and price inquiry please contact us at: sales@taelco.com or www.taelco.com/en/contact-us/
Shipping, customs fees etc. are not included in the price quotation. TAE LCO is not responsible for customs clearance.

Dimensions and Interfaces

Housing & Pressure Interface

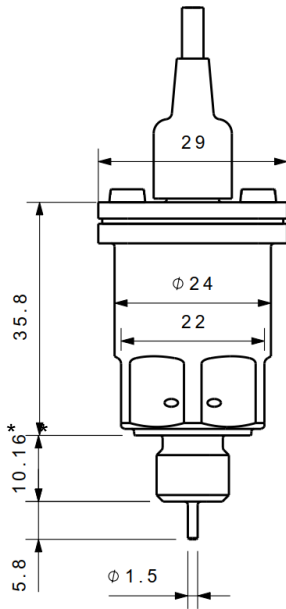

Electrical Interface

The electrical interface is a cable with 5 x 26 AWG conductors. Cable specifications are given in Electrical Specifications table.

Wire Color Code		
Supply +	Red	
Supply -	Black	
Pressure Signal	White	
Temp Signal	Yellow	
Temp Signal	Blue	

*) For 7/16-20 UNJF thread interface. Please contact us about details for different thread interfaces.

Revision History

Revision	Reasons for Revision	Issue Date
REV B	<ul style="list-style-type: none">• Added mounting torque information to Mechanical Specifications table.• Added footnote about thread interface to Housing & Mechanical Interface section.• Removed G1/4", R1/4", R1/8" mechanical interfaces from Ordering information section.	15.10.2024
REV A	<ul style="list-style-type: none">• First revision.	09.05.2024

Notice and Disclaimer

The information presented here is believed to be correct. TAE LCO assumes no responsibility for the use of its products, nor for the use of any information that has been provided. The user is responsible for determining the suitability of the product for the user's application or use. Specifications subject to change without notice. Trademarks are the property of their respective owners.

Description

The PSC-EP series is an enhanced pressure sensor. Designed to withstand harsh environments and meet the demanding requirements of the aerospace and naval industries, its significantly reduced weight and small design makes it ideal for applications where space and weight are critical.

The PSC-EP grade includes EMI/RFI protection and is operational under extreme vibration and mechanical shock, in environments contaminated with fuels, oils and solvents and has an extended temperature range of -55°C to +125°C.



PSC-EP Series Specifications

Performance

Pressure	
Accuracy	≤ ±0.5% at RT
Non linearity	≤ 0.15% FS
Lifetime Drift (1000h, +125 °C)	≤ 0.5% FS
TEB (-40 °C to +125 °C)	≤ 2.5% FS
TEB (0 °C to +85 °C)	≤ 1.0% FS
Proof pressure	2 x FS pressure
Burst pressure	3 x FS pressure
Pressure response	< 1ms

Environmental Specifications

Low Temp (Storage)	-55 °C DO-160G Section 4.5.1
Low Temp (Operating)	-55 °C DO-160G Section 4.5.2
High Temp (Storage)	+125 °C IEC 60068-2-2
High Temp (Operating)	+125 °C IEC 60068-2-2
Shock	40G 11ms Half Sine 3-axis MIL-STD-810G, Method 516.6
Vibration	Random: 15 to 2000 Hz @ approx. 50G (peak) MIL-STD-810G, Method 514.6
Altitude (Storage)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.I
Altitude (Operating)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.II
Salt Fog	MIL-STD-810G CHG-1, Method 509.6
Sealing	IP67, IEC-60529

Electrical Specifications


Supply voltage ²⁾	0.5-4.5V Output, 9-32VDC 2-10V Output, 12-32VDC
Current consumption	< 10mA
Reverse voltage protection	Yes
Electrical interface ³⁾	D38999/20WB98PN
Bonding	see details ⁴⁾

Mechanical Specifications

Material ⁵⁾	Al7075T7651
Finish ⁶⁾	Anodizing per MIL-A-8625 Type 3 Class 2
Sealing	PTFE
Pressure port	See ordering information
Weight	35g (Aluminum body)
Lock/Safety Wire	Applicable
Mounting Torque	Aluminum : 2.5Nm
	Stainless Steel : 5Nm

1) For aluminum material. Dependent on material.
 2) Please contact us for custom solutions.
 3) For details see electrical interface section on page 3. For different connector materials contact us.
 4) Enclosure and connector offers full and continuous protection from EMI/RFI effects.
 5) For production in different materials please contact us.
 6) Anodizing only for Al7075T7651 material.

Ordering Information

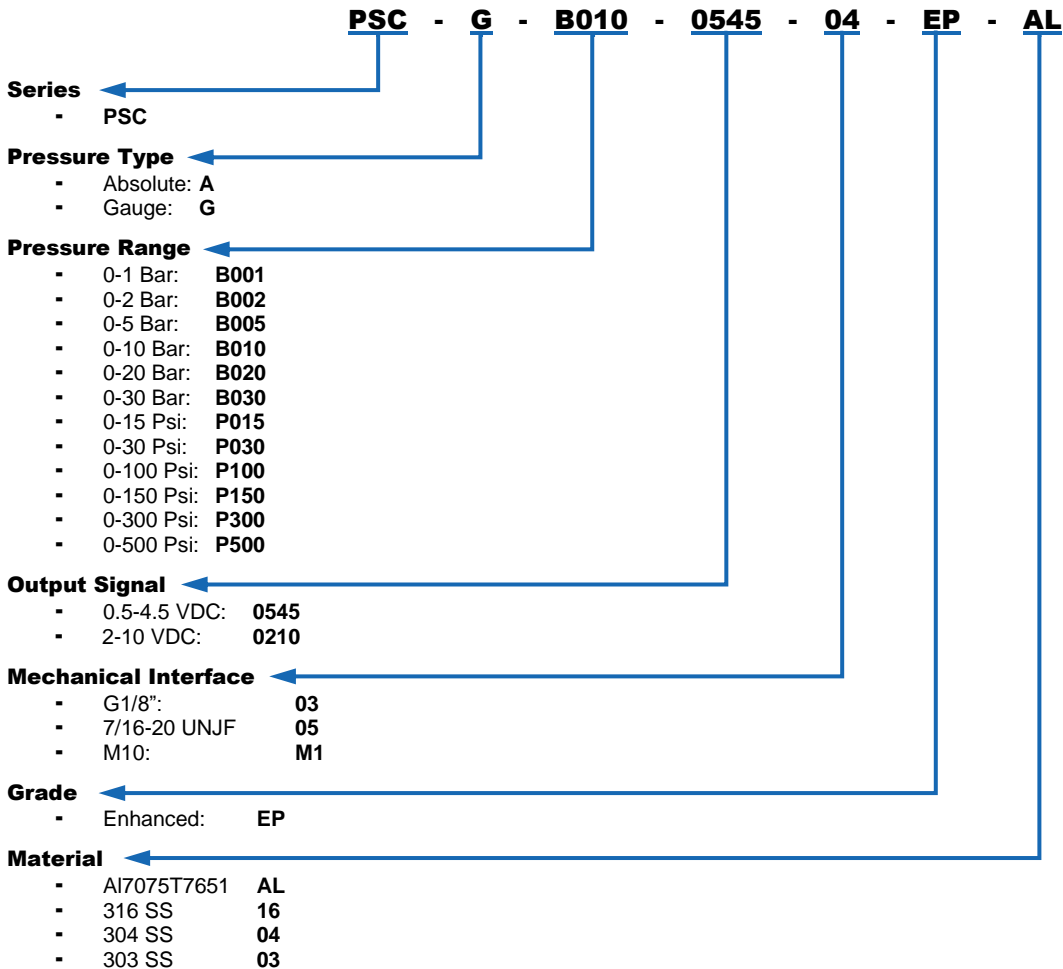


Typical ordering example: Gauge, 10 bar pressure, 0.5-4.5 output signal, M10 mechanical interface, Enhanced grade, Al7075T7651 material: **PSC-G-B010-0545-M1-EP-AL**

For stock and price inquiry please contact us at: sales@taelco.com or www.taelco.com/en/contact-us/
Shipping, customs fees etc. are not included in the price quotation. TAE LCO is not responsible for customs clearance.

Dimensions and Interfaces


Housing & Pressure Interface

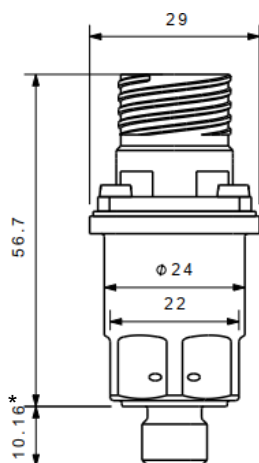

Electrical Interface (I/F)

The electrical I/F is a D38999/20WB98PN compatible circular connector.

Connector Pin Out	
Supply +	A
Pressure Signal	B
GND	C
No Connect (NC)	D
No Connect (NC)	E
No Connect (NC)	F



*) For 7/16-20 UNJF thread interface. Please contact us about details for different thread interfaces.

Revision History

Revision	Reasons for Revision	Issue Date
REV B	<ul style="list-style-type: none">Added mounting torque information to Mechanical Specifications table.Added footnote about thread interface to Housing & Mechanical Interface section.Removed G1/4", R1/4", R1/8" mechanical interfaces from Ordering information section.	08.10.2024
REV A	<ul style="list-style-type: none">First revision.	12.09.2024

Notice and Disclaimer

The information presented here is believed to be correct. TAE LCO assumes no responsibility for the use of its products, nor for the use of any information that has been provided. The user is responsible for determining the suitability of the product for the user's application or use. Specifications subject to change without notice. Trademarks are the property of their respective owners.

Description

The TSC-EP series is an enhanced temperature sensor. Designed to withstand harsh environments and meet the demanding requirements of the aerospace and naval industries, its significantly reduced weight and small design makes it ideal for applications where space and weight are critical.

The TSC-EP grade includes EMI/RFI protection and is operational under extreme vibration and mechanical shock, in environments contaminated with fuels, oils and solvents and has an extended temperature range of -55°C to +125°C.



TSC-EP Series Specifications

Performance	
Temperature	
RTD operating range	-200 +600 °C
RTD compensated range	-50 +600 °C
Accuracy	PT100 / PT1000 Class B
Temp response time ¹⁾	< 3s


Environmental Specifications	
Low Temp (Storage)	-55 °C DO-160G Section 4.5.1
Low Temp (Operating)	-55 °C DO-160G Section 4.5.2
High Temp (Storage)	+125 °C IEC 60068-2-2
High Temp (Operating)	+125 °C IEC 60068-2-2
Shock	40G 11ms Half Sine 3-axis MIL-STD-810G, Method 516.6
Vibration	Random: 15 to 2000 Hz @ approx. 50G (peak) MIL-STD-810G, Method 514.6
Altitude (Storage)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.I
Altitude (Operating)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.II
Salt Fog	MIL-STD-810G CHG-1, Method 509.6
Sealing	IP67, IEC-60529

Electrical Specifications	
Output temperature ²⁾	PT100 / PT1000
Electrical interface ³⁾	MS3112-A8-3P
Bonding	see details ⁴⁾
RTD max current	PT100 : 1.4mA
	PT1000 : 0.4mA

Mechanical Specifications	
Material ⁵⁾	Al7075T7651
Finish ⁶⁾	Anodizing per MIL-A-8625 Type 3 Class 2
Weight	15g
Lock/Safety Wire	Applicable
Mounting Torque	Aluminum : 2.5Nm
	Stainless Steel : 5Nm

1) For aluminum material. Dependent on material.
 2) Please contact us for custom solutions.
 3) For details see electrical interface section on page 3. For different connector materials contact us.
 4) Enclosure and connector offers full and continuous protection from EMI/RFI effects.
 5) For production in different materials please contact us.
 6) Anodizing only for Al7075T7651 material.

Ordering Information

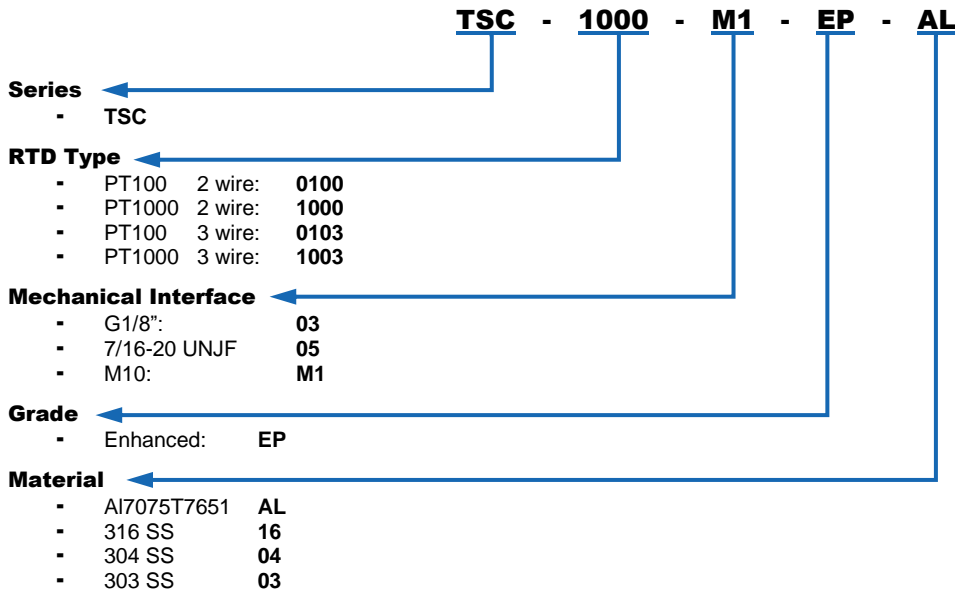


Typical ordering example: PT1000 RTD, M10 mechanical interface, Enhanced grade, AI7075T7651 material:
TSC-1000-M1-EP-AL

For stock and price inquiry please contact us at: sales@taelco.com or www.taelco.com/en/contact-us/
Shipping, customs fees etc. are not included in the price quotation. TAE LCO is not responsible for customs clearance.

Dimensions and Interfaces


Housing & Mechanical Interface

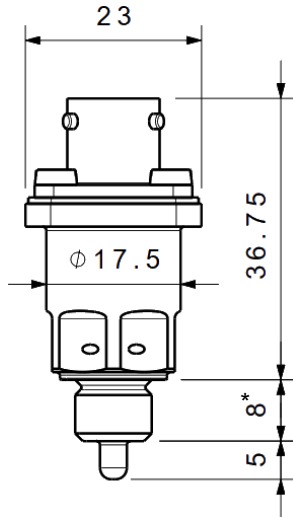

Electrical Interface (I/F)

The electrical I/F is a MS3112-A8-3P compatible circular connector.

Connector Pin Out	
Temp Signal 1	A
Temp Signal 2	B
No Connect (2 wire)	C
Temp Signal 2 (3 wire)	

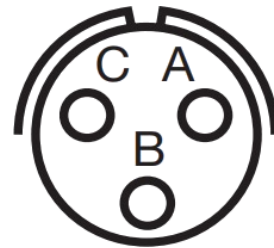

*) For M10 thread interface. Please contact us about details for different thread interfaces.

Revision History

Revision	Reasons for Revision	Issue Date
REV B	<ul style="list-style-type: none">• Changed header title to "Enhanced Temperature Transducers".• Added mounting torque information to Mechanical Specifications table.• Changed weight in Mechanical Specifications table.• Removed sealing from Mechanical Specifications table• Added footnote about thread interface to Housing & Mechanical Interface section.• Removed G1/4", R1/4", R1/8" mechanical interfaces from Ordering information section.	02.10.2024
REV A	<ul style="list-style-type: none">• First revision.	12.09.2024

Notice and Disclaimer

The information presented here is believed to be correct. TAE LCO assumes no responsibility for the use of its products, nor for the use of any information that has been provided. The user is responsible for determining the suitability of the product for the user's application or use. Specifications subject to change without notice. Trademarks are the property of their respective owners.

Description

The TSCL-EP series is an enhanced temperature sensor. Designed to withstand harsh environments and meet the demanding requirements of the aerospace and naval industries, its significantly reduced weight and small design makes it ideal for applications where space and weight are critical.

The TSCL-EP grade includes EMI/RFI protection and is operational under extreme vibration and mechanical shock, in environments contaminated with fuels, oils and solvents and has an extended temperature range of -55°C to +125°C.



TSCL-EP Series Specifications

Performance	
Temperature	
RTD operating range	-200 +600 °C
RTD compensated range	-50 +600 °C
Accuracy	PT100 / PT1000 Class B
Response time ¹⁾	< 3s


Environmental Specifications	
Low Temp (Storage)	-55 °C DO-160G Section 4.5.1
Low Temp (Operating)	-55 °C DO-160G Section 4.5.2
High Temp (Storage)	+125 °C IEC 60068-2-2
High Temp (Operating)	+125 °C IEC 60068-2-2
Shock	40G 11ms Half Sine 3-axis MIL-STD-810G, Method 516.6
Vibration	Random: 15 to 2000 Hz @ approx. 50G (peak) MIL-STD-810G, Method 514.6
Altitude (Storage)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.I
Altitude (Operating)	45000 feet per MIL-STD-810G CHG-1, Method 500.6-P.II
Salt Fog	MIL-STD-810G CHG-1, Method 509.6
Sealing	IP67, IEC-60529

Electrical Specifications	
Output temperature ²⁾	PT100 / PT1000
Electrical interface ³⁾	MS3112-A8-3P
Bonding	see details ⁴⁾
RTD max current	PT100 : 1.4mA
	PT1000 : 0.4mA

Mechanical Specifications	
Material ⁵⁾	Al7075T7651
Finish ⁶⁾	Anodizing per MIL-A-8625 Type 3 Class 2
Weight	17g (Aluminum body)
Lock/Safety Wire	Applicable
Mounting Torque	Aluminum : 2.5Nm
	Stainless Steel : 5Nm

1) For aluminum material. Dependent on material.
 2) Please contact us for custom solutions.
 3) For details see electrical interface section on page 3. For different connector materials contact us.
 4) Enclosure and connector offers full and continuous protection from EMI/RFI effects.
 5) For production in different materials please contact us.
 6) Anodizing only for Al7075T7651 material.

Ordering Information

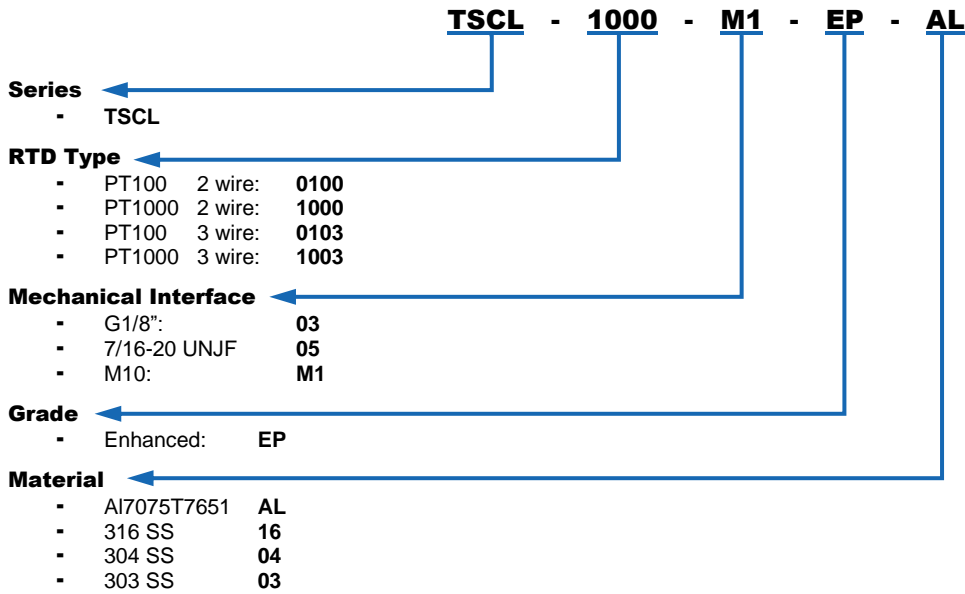


Typical ordering example: PT1000 RTD, M10 mechanical interface, Enhanced grade, AI7075T7651 material:
TSCL-1000-M1-EP-AL

For stock and price inquiry please contact us at: sales@taelco.com or www.taelco.com/en/contact-us/
Shipping, customs fees etc. are not included in the price quotation. TAE LCO is not responsible for customs clearance.

Dimensions and Interfaces


Housing & Mechanical Interface

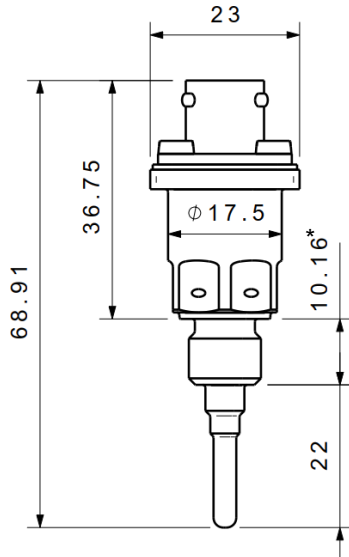

Electrical Interface (I/F)

The electrical I/F is a MS3112-A8-3P compatible circular connector.

Connector Pin Out	
Temp Signal 1	A
Temp Signal 2	B
No Connect (2 wire)	C
Temp Signal 2 (3 wire)	

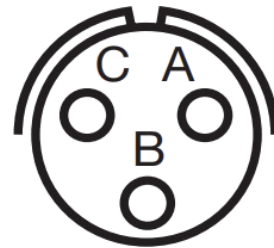

*) For 7/16-20 UNJF thread interface. Please contact us about details for different thread interfaces.

Revision History

Revision	Reasons for Revision	Issue Date
REV B	<ul style="list-style-type: none">• Added mounting torque information to Mechanical Specifications table.• Changed weight in Mechanical Specifications table.• Removed sealing from Mechanical Specifications table• Added footnote about thread interface to Housing & Mechanical Interface section.• Removed G1/4", R1/4", R1/8" mechanical interfaces from Ordering information section.	02.10.2024
REV A	<ul style="list-style-type: none">• First revision.	01.10.2024

Notice and Disclaimer

The information presented here is believed to be correct. TAE LCO assumes no responsibility for the use of its products, nor for the use of any information that has been provided. The user is responsible for determining the suitability of the product for the user's application or use. Specifications subject to change without notice. Trademarks are the property of their respective owners.